

Appendix G. Focus Station Area Action Plans for Concord

Project Background and Purpose

BART developed *Safe Trips to BART: An Action Plan for Safer Roadways*, an action plan to reduce and eliminate fatal and severe roadway injuries on BART property and roadways surrounding stations. This effort is funded by the US Department of Transportation's Safe Streets for All grant program, which supports initiatives to prevent deaths and severe injuries on roadways. BART's Safety Action Plan builds on local and regional safety efforts related to Vision Zero, a global movement to eliminate severe and fatal injuries on roadways.

The Focus Station Area Action Plans (FSAAPs) are a set of conceptual roadway safety recommendations for the selected focus stations based on the systemic safety analysis and toolbox developed through this action plan.

BART will not implement these recommendations directly, as these roadways are largely outside of BART's jurisdiction. Instead, BART will collaborate with local agencies having jurisdiction (AHJs) to seek funding and support the execution of these plans. AHJs are encouraged to implement these recommendations in a manner that aligns with their agency's goals and maintains acceptable service levels for transit operators and other city services.

High Injury Network (HIN)

BART developed a High Injury Network (HIN) to identify and prioritize areas of the street network where injuries and fatalities have been occurring most frequently. Streets on the HIN should be prioritized for improvements ahead of streets not on the HIN.

The primary input in the development of the HIN was police crash report data that were retrieved for the years 2019-2023 from UC Berkeley's Transportation Injury Mapping System (TIMS). TIMS data are derived from California's Statewide Integrated Traffic Records System (SWITRS) and geocoded by UC Berkeley's SafeTREC. A full description of the BART HIN methodology and analysis is outlined in Appendix B.

The BART HIN is expected to differ from other HINs created by various local and regional partner agencies due to variations in data and methodologies. The BART HIN is a regional HIN that was developed using data from station areas across five counties, whereas other HINs were developed using more local data or data for the nine-county Bay Area. The BART HIN does not aim to replace, but rather seeks to complement other HINs by providing additional evidence to support investment in priority corridors.

Station Study Area

Station study areas are the areas surrounding BART stations where riders typically walk, bike, or drive to get to the BART station. BART's Station Access Typology (2016) was used to define the types and sizes of the study areas. BART's Station Access Typology defines five station types characterized by the built environment and orientation to driving: Urban, Urban with Parking, Balanced Intermodal, Intermodal - Auto Reliant, and Auto Dependent. The study area sizes selected for each station access type were pulled from BART's Station Profile Study (2015), and study areas were developed using the open-source tool OpenTripPlanner. More details can be found in Appendix B.

Selection of Focus Station Areas

Several criteria were used to determine the selected stations, including crash history, the absence of planned or recently completed local safety improvements, station location in equity priority community areas, and local agency capacity to support this effort. BART also considered whether the station had plans for transit-oriented development. At least one station from each of the five counties was selected, and one additional station was selected from the two largest counties: Alameda and Contra Costa.

First, BART reached out to the cities with stations that had the highest crash statistics. Further discussion with local and county partners revealed that some cities already had ongoing safety efforts and did not have capacity to work with BART to develop FSAAPs. Next, BART spoke to county representatives and Steering Committee members to identify which agencies had need, interest, and capacity to support development of these plans. The following seven stations were selected as a result of this criteria: **Balboa Park** (City and County of San Francisco), **Coliseum** (Alameda County), **Colma** (San Mateo County), **Concord** (Contra Costa County), **Hayward** (Alameda County), **Milpitas** (Santa Clara County), and **Richmond** (Contra Costa County).

Existing Plans Review

A full review of existing plans and planned projects was conducted for all 48 non-airport BART stations (Review of Existing Plans and Projects by Station Area and Agency – Appendix C). The planned projects for each of the seven Focus Station Areas were reviewed to ensure that recommendations would complement these efforts and offer additional suggestions where relevant. These projects are shown in purple throughout the FSAAP documents.

Focus Station Area Walk Audit

Walk audit routes were determined in collaboration with partner agency staff. Inputs included choosing public roads and intersections that were contained in the Station Study Area HIN, those that were identified by public or agency staff, and/or locations where there were no improvements planned. Based on this information, the project team developed a recommended walking route that guided each walk audit. In some cases, other streets were also considered for improvements based on observations during the site visit and recommendations from agency staff and representatives from citizen groups who joined the walk audit. Only a selection of streets on the HIN were feasible to visit due to time constraints.

Countermeasure Selection

BART developed a toolbox of traffic safety countermeasures to guide the selection of interventions recommended as part of the FSAAPs. The toolbox draws from industry best practice such as the NCHRP 926 Report: Guidance to Improve Pedestrian & Bicyclist Safety at Intersections, the Caltrans Pedestrian Safety Countermeasures Toolbox, FHWA's Proven Safety Countermeasures list, and local stakeholder input.

Safety benefits are described within the FSAAPs according to the FHWA Safe System Roadway Design Hierarchy, which is informed by the Safe System Approach. The Safe System Approach is a traffic safety philosophy that accounts for the likelihood that people make mistakes, but the cost of those mistakes should not result in a loss of life or serious injury. The four tiers of the hierarchy are described below:

Tier 1 - Remove Severe Conflicts: Countermeasures in this tier aim to eliminate high risk conditions by providing physical separation between users moving at different speeds or in different directions to minimize conflicts and reduce collision risk. This separation is typically accomplished with countermeasures that address intersection and roadway design.

Tier 2 - Reduce Vehicle Speeds: Countermeasures in this tier aim to implement appropriate speed limits and speed management strategies to limit crash severity and likelihood. Speed management countermeasures include elements of self-enforcing roadways (i.e., roadways that communicate the appropriate speed and user behavior through land use and design) and traffic calming to slow vehicles and enforce appropriate vehicle speeds.

Tier 3 - Manage Conflicts in Time: Countermeasures in this tier aim to separate users in time, e.g. with traffic signals or hybrid beacons to reduce crash likelihood.

Tier 4 - Increase Attentiveness and Awareness: Countermeasures in this tier aim to alert roadway users to potential conflicts and reinforce the concept of shared responsibility. Typical tier 4 countermeasures reinforce key elements of the roadway and remind users to stay aware and comply with the rules of the road.

Final Recommendations

A design session to brainstorm recommended improvements followed every walk audit, and all participants provided input to ensure a collaborative process. The identified roadway safety measures were summarized in the FSAAP, which were distributed to partner agencies to ensure alignment. Partner agency concurrence was crucial as they would be the ones taking the lead to design, fund, and construct the recommended improvements on roadways under their jurisdiction. As the partner agencies take these recommendations forward, further coordination will be needed to ensure the final designs do not interfere with bus operations or other city services.

It is important to note that only a selection of streets on the HIN were feasible to include in the FSAAP due to time and budget constraints. The FSAAPs reflect recommendations that were identified during the walk audit and do not capture the full extent of possible safety interventions within a Station Study Area.

Safe Trips to BART

Focus Station Area Action Plan



Cost Estimates

Capital cost estimates were assessed for each of the recommendations that were identified on the walk audit. The estimates include direct costs, indirect costs, contractors' costs, and contingency, and they are assessed at a Class 5 estimate according to the Association for the Advancement of Cost Engineering classification matrix. The primary methodology follows a parametric approach using historical data and is supplemented by unit cost assemblies. Cost estimates were rounded up to the nearest \$100,000 or the nearest \$10,000 if under \$50,000.

Cost estimates do not include projects that have been identified by local jurisdictions (shown in purple call-outs) or recommendations that begin with "study" or "explore." The estimates also do not include utility change costs associated with concrete elements, signal equipment upgrade costs, or bus shelter costs unless specified.

Key Definitions

Station Access Type

The BART 'Station Access Type' reflects the current and aspirational (if applicable) typology of the station according to BART's 2016 Station Access Policy ([Station Access Policy](#)). This information provides context for the area surrounding the station and may impact the access mode share. Aspirational access types help inform the kind of development that may be anticipated around the station in the future.

Access Mode Share

'Access Mode Share' reflects the mode share of riders traveling between from home locations to BART as assessed during the 2015 Station Profile Study, which was the most recently available data ([Station Profile Study](#)).

Station Area Map

The 'Station Area Map' shows the study area that was reviewed as part of this process. Yellow lines indicate a corridor located on the High Injury Network (HIN) that was developed as part of this project, and purple outlines indicate an area where planned projects have already been identified by the local jurisdictions or as part of wider planning efforts.

Safety by the Numbers

The 'Safety by the Numbers' section of the FSAAPs offers a snapshot of collision data from within the study area between 2019-2023. This data comes from the Transportation Injury Mapping System (TIMS), which is maintained by UC Berkeley. The 'Percent of station study area street miles on the HIN' indicates how widely station access may be impacted by traffic safety challenges.

Killed/Severe Injury (KSI) Crashes

The Killed/Severe Injury (KSI) Crashes shows how the total number of people killed or severely injured within the study area is distributed across different modes.

Key Corridors and Intersections

The 'Key Corridors and Intersections' map shows the HIN as well as the locations where recommendations identified during the walk audit are located throughout the study area.



Corridor and Intersection Recommendations

The Corridor and Intersection Recommendations graphics describe the recommended improvements along corridors and at intersections throughout the study area. Where applicable, previously-identified planning projects are also shown. Corridor recommendations are labeled on maps while intersection recommendations are drawn. Safety benefits for each set of recommendations are provided below each graphic and organized by the Safe System Approach tiers. AHJs are encouraged to implement these recommendations in a manner that aligns with their agency's goals.


Station at a Glance

Station Access Type: Intermodal - Auto Reliant

Access Mode Share



Station Area Map

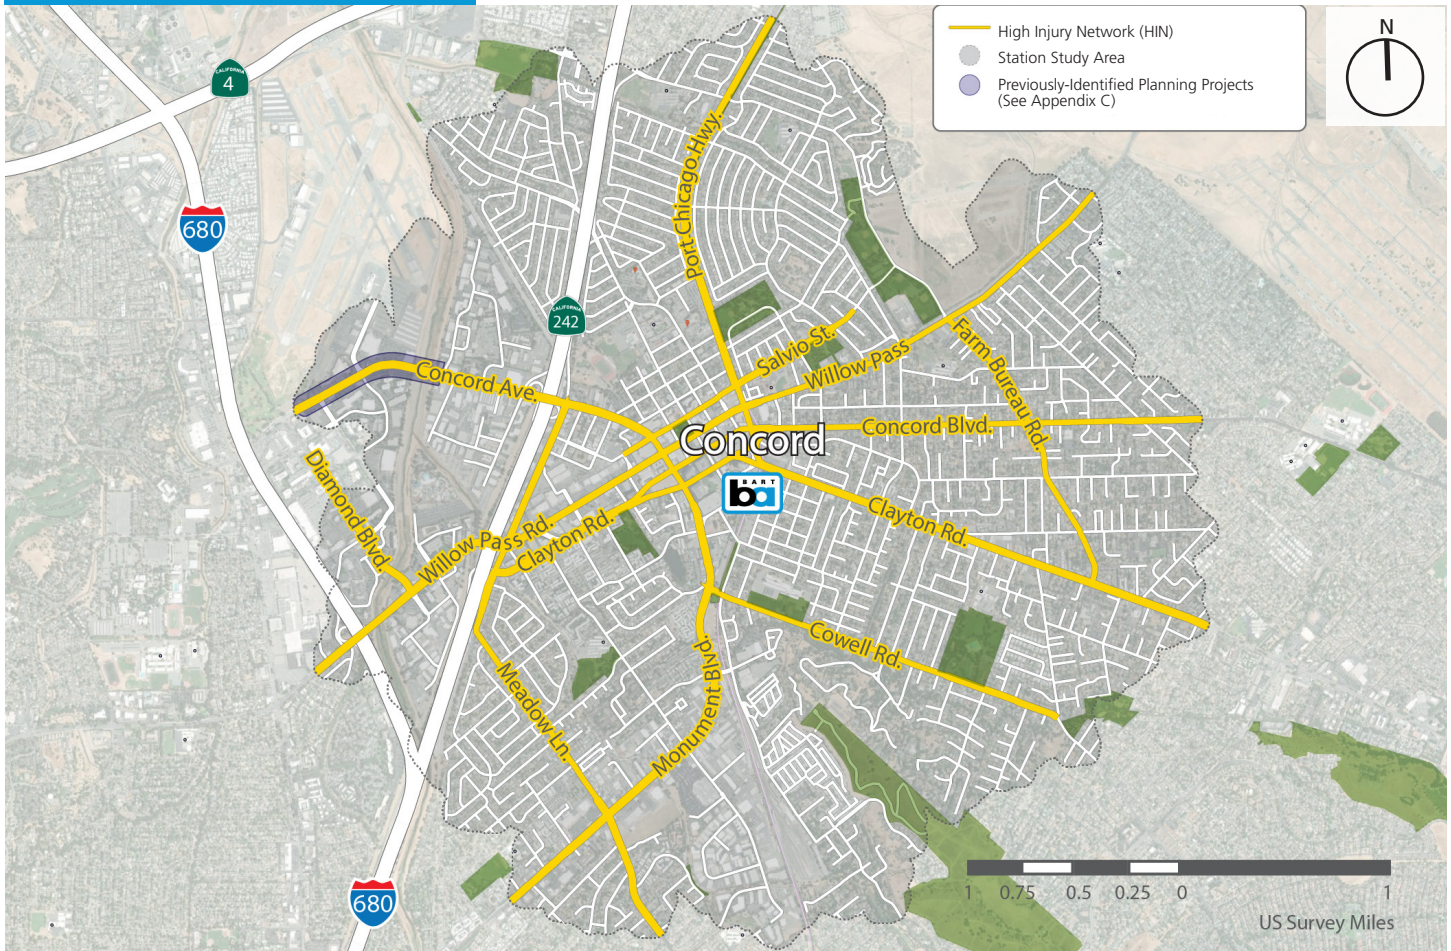

Jurisdiction(s) with roads on HIN: City of Concord, Contra Costa County, and Caltrans

Safety by the Numbers

5-year Collision Data: 2019-2023


18% Percent of Station study area street miles on the HIN

95 Number of people killed or severely injured (KSI)


8% Percent of crashes that resulted in KSI

Killed/Severe Injury (KSI) Crashes

Total KSI: 95

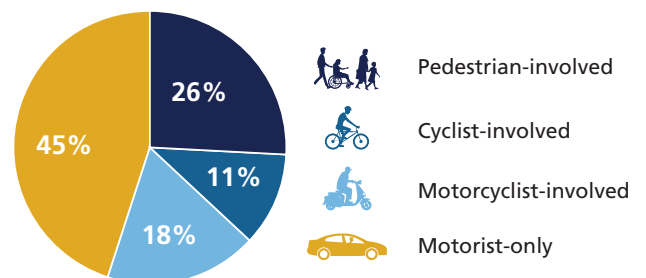

Key Corridors and Intersections

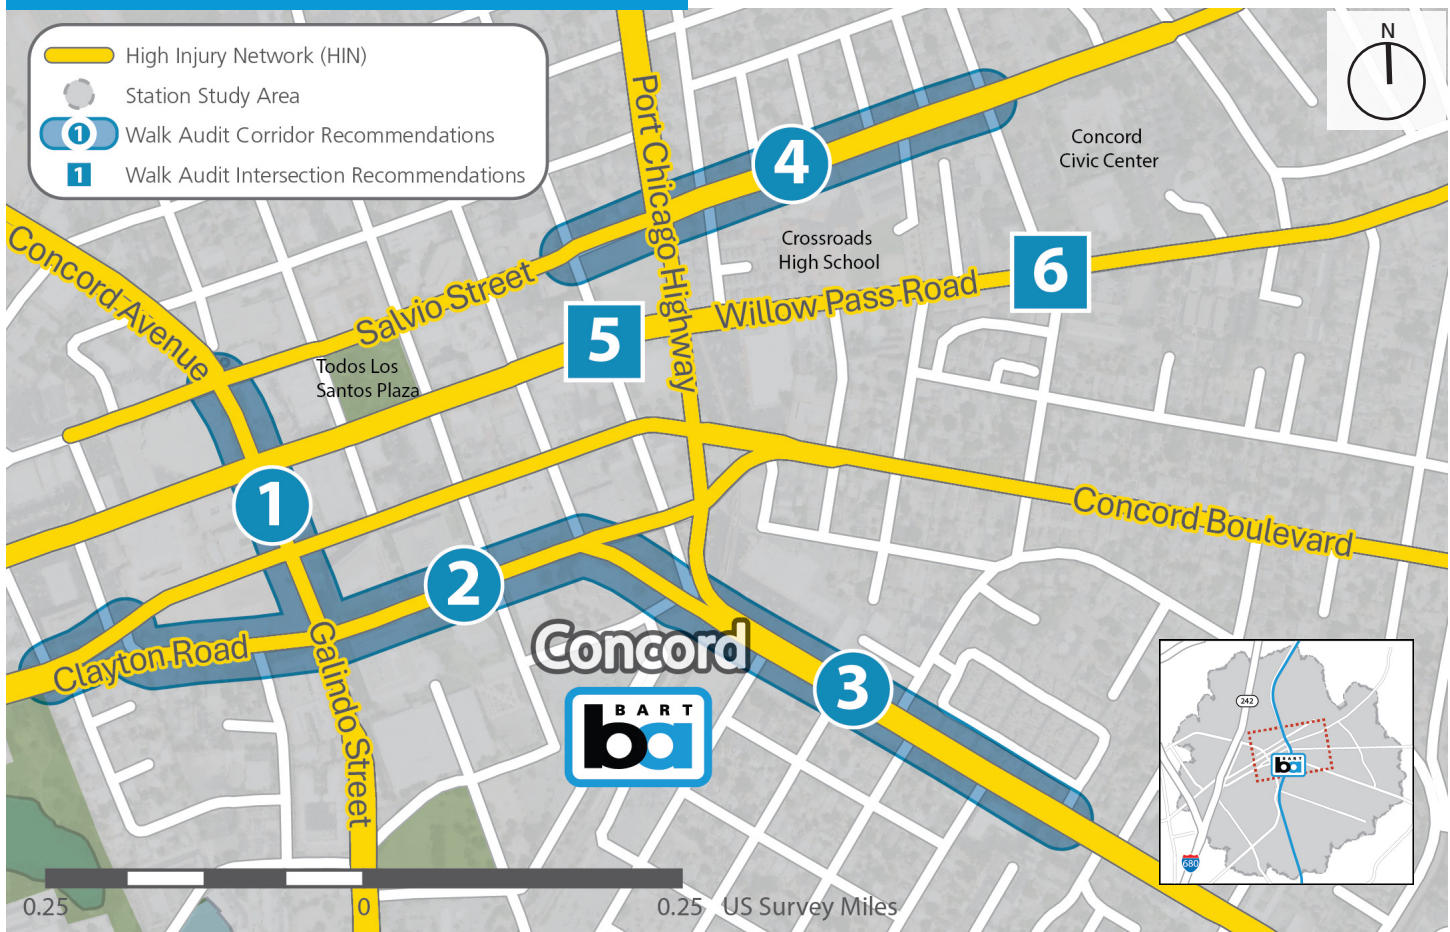

Jurisdiction(s) with roads on HIN: City of Concord, Contra Costa County, and Caltrans


- 1** Galindo St from Salvio St to Clayton Rd; Willow Pass Rd
- 2** Clayton Road from Sutter Street to Grant Street
- 3** Clayton Road from Park St to The Alameda; Sunset St and East St
- 4** Salvio Street from East Street to Parkside Drive
- 5** Willow Pass Road & East Street
- 6** Willow Pass Road & Parkside Drive

1 Galindo St from Salvio St to Clayton Rd; Willow Pass Rd

Corridor Context

- This north-south arterial serves a high volume of vehicle traffic and has a speed limit of 30-35 mph. There are long-term plans to construct a shared-use path on the east side of the corridor to provide bicycle access to BART.
- The City identified three intersections on Galindo Street for the walk audit that were on the top ten list for total collisions (Galindo Street at Clayton Street, Concord Boulevard, and Willow Pass Road).
- There is pedestrian activity on nearby Willow Pass Road where there are also has high volumes of fast cars.
- There have been 78 collisions on this corridor from 2019 to 2023. The primary collision factors were traffic signal violations and unsafe speeds.

Corridor Recommendations

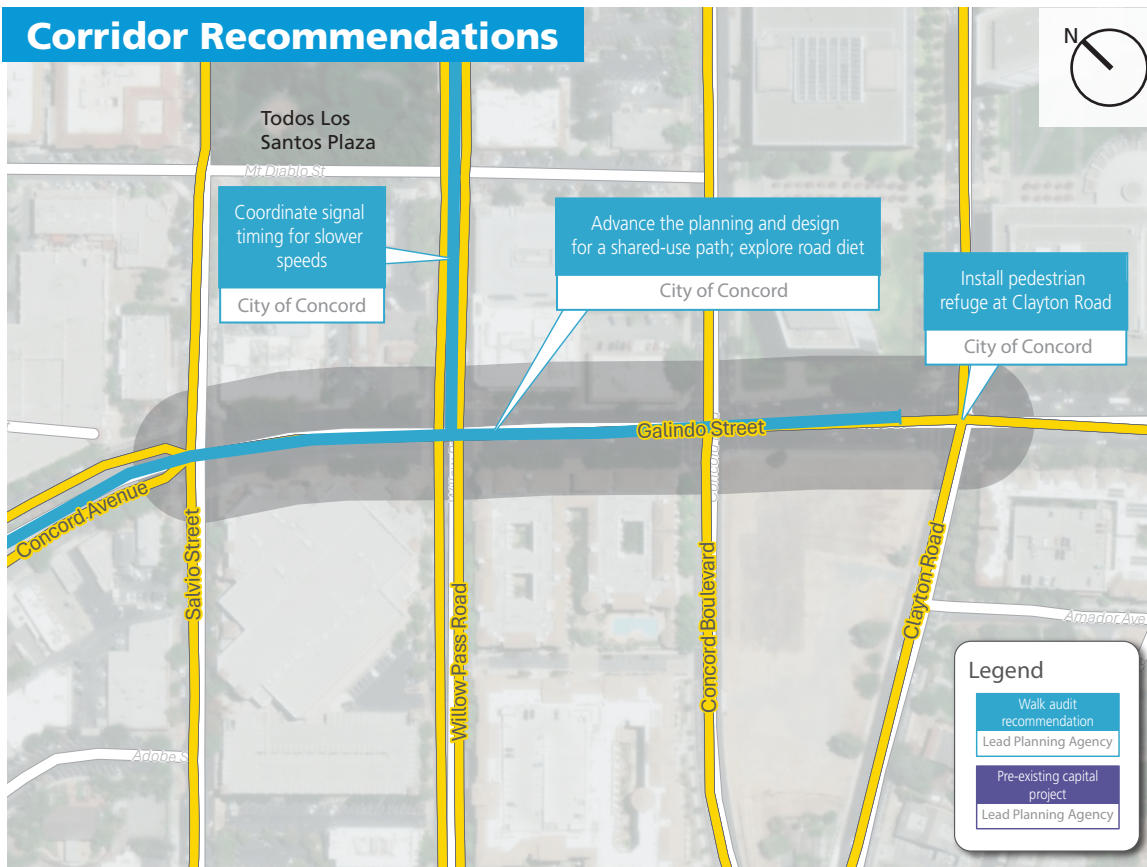

Safety Benefits

FHWA Tier 1 Safety Countermeasure to Remove Severe Conflicts:

- A shared use path that is physically separated from vehicle traffic will provide safety and access benefits for people to bicycle to and from BART.
- Road diets reduce the number and width of vehicle lanes, which can help reduce vehicle speeds and allow for additional pedestrian and bicyclist safety treatments.

FHWA Tier 2 Safety Countermeasure to Reduce Vehicle Speeds:

- Coordinated signal timing can manage vehicle speeds, increasing pedestrian safety. It can also create a steady and predictable flow of traffic, minimizing abrupt stops and starts that can lead to rear-end collisions.

Estimated Capital Cost

\$40,000


In US Dollars 2025

2 Clayton Road from Sutter Street to Grant Street

Corridor Context

- Clayton Road is a one-way arterial with five travel lanes that runs adjacent to many office buildings in downtown Concord. A buffered bike lane is provided between Sutter and Grant Streets and is not yet connected into the surrounding bike network. Current best practice is to provide a higher degree of physical separation from vehicle traffic and to close gaps in the bike network.
- Multiple survey respondents reported safety concerns on Clayton Road, citing fast cars and lack of bicycle facilities.
- There were 42 collisions reported on this corridor from 2019 to 2023, with one resulting in a fatality. Over 50% of collisions were broadside collisions.

Corridor Recommendations

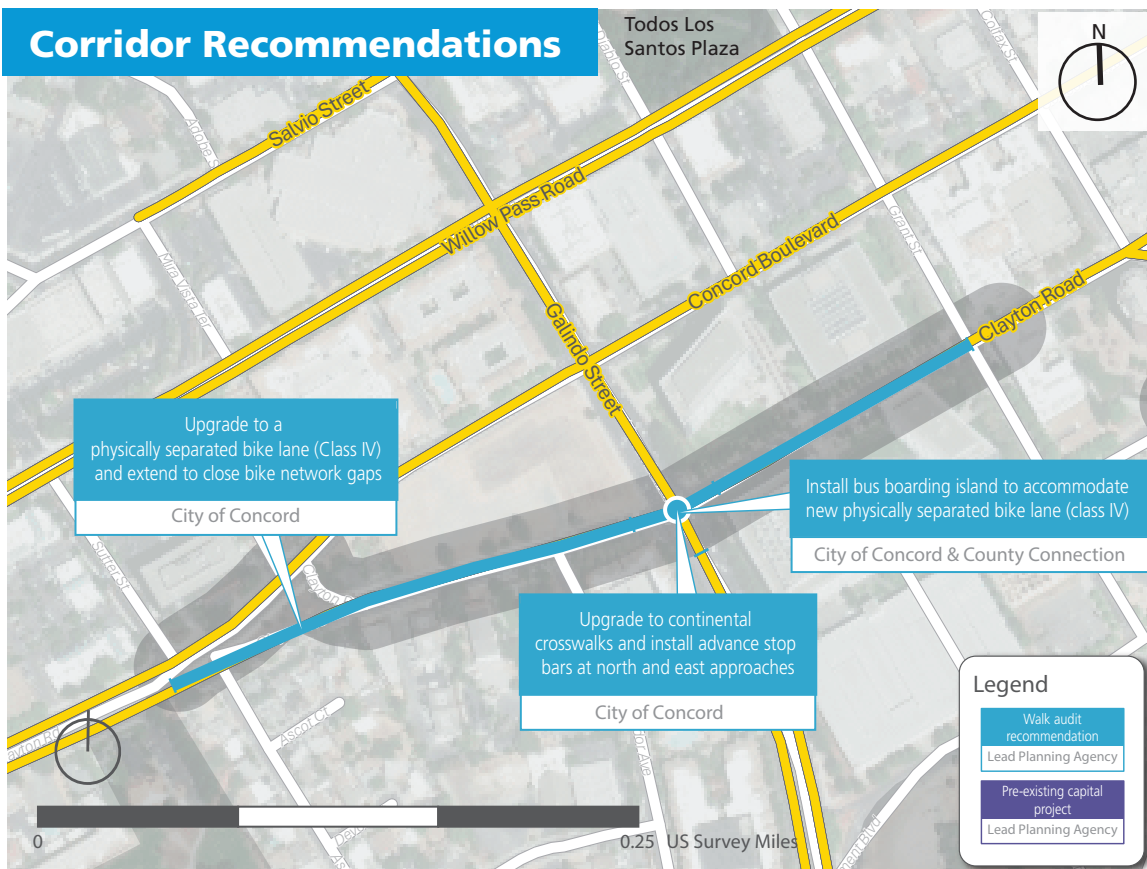

Safety Benefits

FHWA Tier 1 Safety Countermeasure to Remove Severe Conflicts:

- Physically separated bicycle lanes will provide more separation between bicyclist and vehicles to reduce chance for severe conflicts.

FHWA Tier 4 Safety Countermeasure to Increase Attentiveness and Awareness:

- High-visibility crosswalks and advance stop bars increase the visibility of pedestrians at marked crosswalks.
- Advance stop bars improve visibility of crossing pedestrians by increasing the distance between stopped motorists and crossing pedestrians.

Estimated Capital Cost


\$100,000
In US Dollars 2025

3 Clayton Road from Park St to The Alameda; Sunset St and East St

Corridor Context

- Clayton Road has 4 travel lanes and is divided by a median east of Park Street and the BART station. It intersects three different streets at the BART station including Park Street, East Street, and Port Chicago Highway, prioritizing high volumes of cars and providing limited pedestrian crossings.
- Multiple survey respondents reported safety concerns on Clayton Road, citing speeding and lack of bicycle facilities.
- There were 22 collisions reported on this corridor from 2019 to 2023, with one resulting in a severe injury. The top cause for collisions were traffic signal violations, followed by unsafe speeds.

Corridor Recommendations

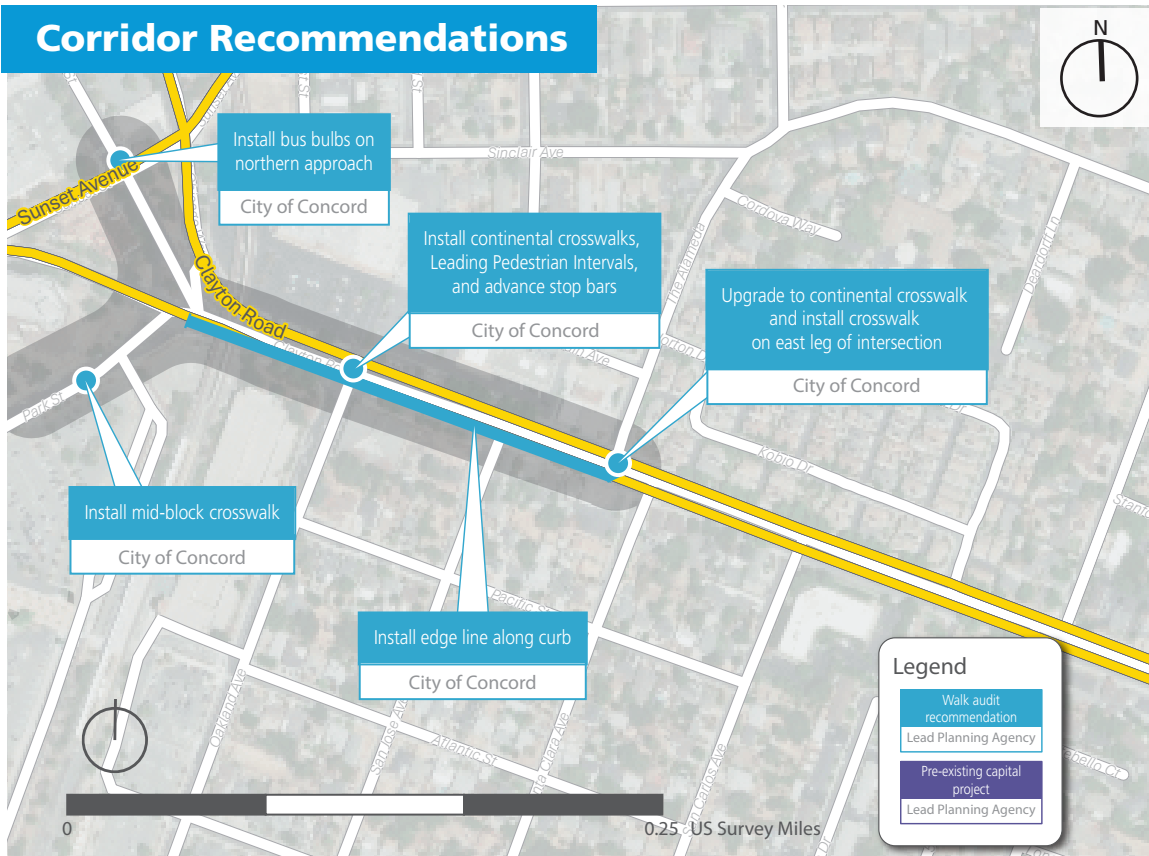

Safety Benefits

FHWA Tier 1 Safety Countermeasure to Remove Severe Conflicts:

- Bus bulbs reduce pedestrian crossing distance and minimize conflicts caused by buses pulling into and out of the travel lane.

FHWA Tier 2 Safety Countermeasure to Reduce Vehicle Speeds:

- Edge lines reduce the width of the travel lane, encouraging slower speeds.

FHWA Tier 3 Safety Countermeasure to Manage Conflicts in Time:

- Leading Pedestrian Intervals (LPIs) allow pedestrians to begin crossing before vehicles are given the green signal.

FHWA Tier 4 Safety Countermeasure to Increase Attentiveness and Awareness:

- High-visibility crosswalks increase the visibility of pedestrians at marked crosswalks.
- Advance stop bars improve visibility of crossing pedestrians by increasing the distance between stopped motorists and crossing pedestrians.

Estimated Capital Cost

\$100,000


In US Dollars 2025

4 Salvio Street from East Street to Parkside Drive

Corridor Context

- Salvio Street is an east-west collector that serves as a multimodal corridor connecting Concord's Civic Center, Todos Santos Plaza and nearby residential neighborhoods. There is currently a buffered bike lane in this section.
- Reducing vehicles on this corridor is important because it is adjacent to Crossroads High School and residential communities.
- There were 14 recorded collisions on this corridor, and most of them were related to traffic signal violations.

Corridor Recommendations

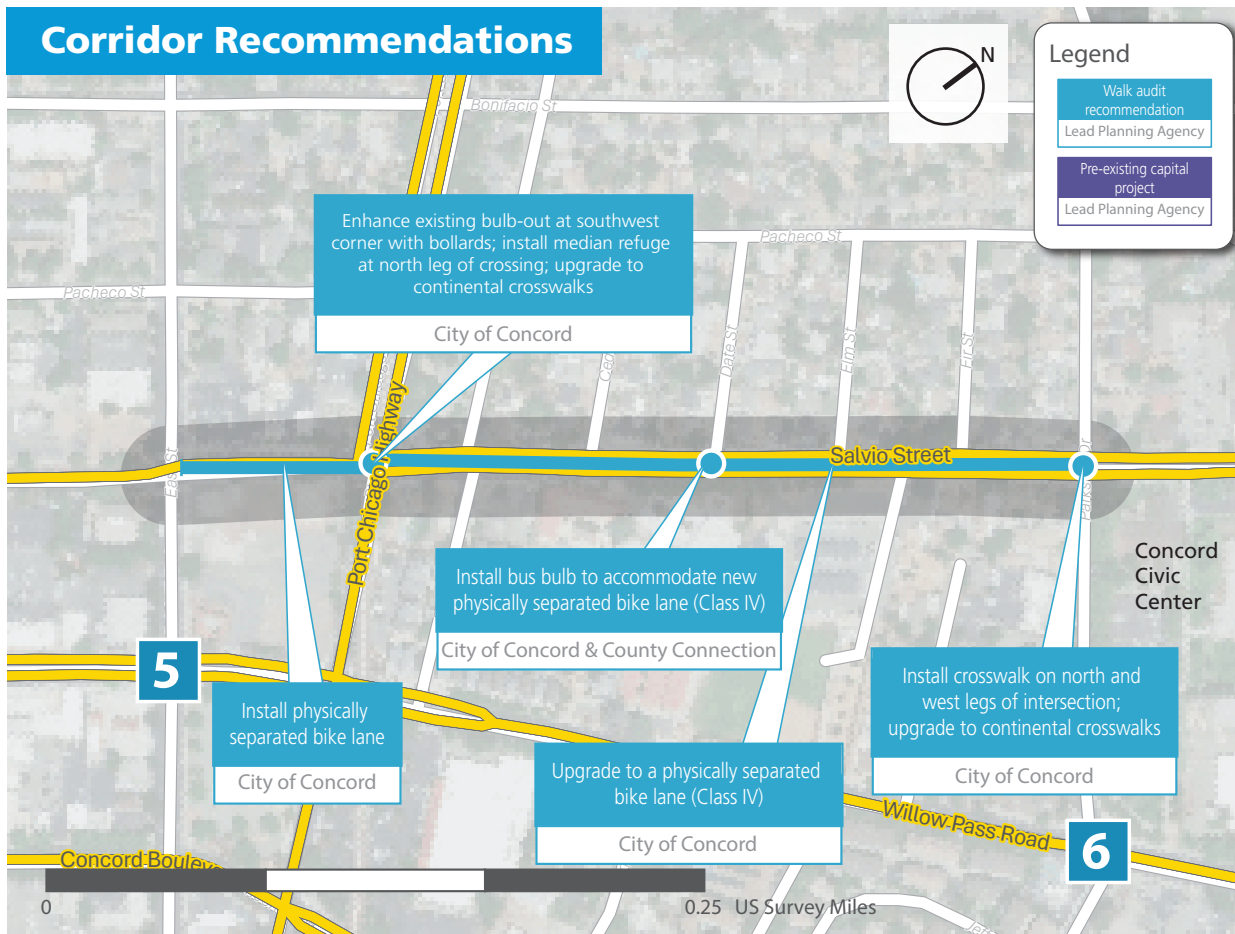

Safety Benefits

FHWA Tier 1 Safety Countermeasure to Remove Severe Conflicts:

- Physically separated bicycle lanes will provide physical barrier between bicyclist and vehicles to reduce chance for severe conflicts.
- A pedestrian refuge reduces exposure and allows pedestrians to focus on crossing one direction of traffic at a time.
- Bulb-outs reduce the distance pedestrians need to cross, decreasing the time they are exposed to traffic.

FHWA Tier 4 Safety Countermeasure to Increase Attentiveness and Awareness:

- High-visibility crosswalks make crossing pedestrians more visible to drivers.
- Bulb-outs improve sight lines between pedestrians and drivers.

Estimated Capital Cost

\$200,000


In US Dollars 2025

5 Willow Pass Road & East Street

Intersection Context

- Willow Pass Road is considered a high volume street with 30-35 mph speed limits in the downtown district, where there is high pedestrian activity.
- The intersection of Willow Pass Road and East Street is adjacent to the future Concord Village Project, which will be a five story building with 230 residential units. Improving safety at this location will be important with an increase in pedestrian activity.
- There were 11 collisions recorded at this intersection, with traffic signal violation as the most common cause.

Intersection Recommendations

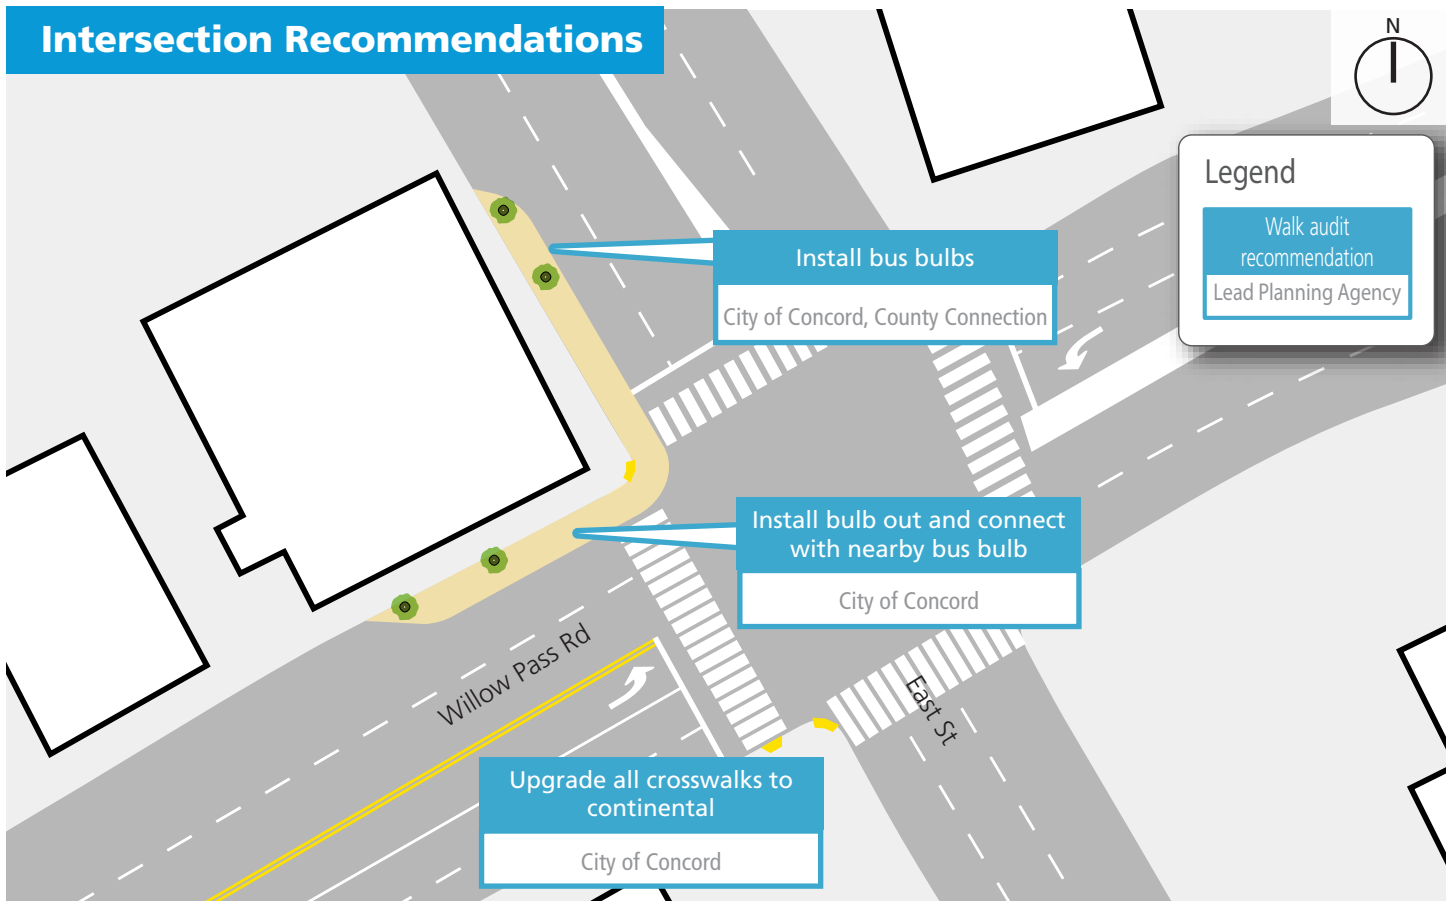

Safety Benefits

FHWA Tier 1 Safety Countermeasure to Remove Severe Conflicts:

- Bus bulbs reduce pedestrian crossing distance and exposure to conflicts with vehicles.

FHWA Tier 2 Safety Countermeasure to Reduce Vehicle Speeds:

- Bus bulbs reduce the width of the roadway and encourage drivers to reduce speed.

FHWA Tier 4 Safety Countermeasure to Increase Attentiveness and Awareness:

- High-visibility continental crosswalks make crossing pedestrians more visible to drivers.

Estimated Capital Cost

\$100,000


In US Dollars 2025

6 Willow Pass Road & Parkside Drive

Intersection Context

- Willow Pass Road is a primary gateway to Concord Civic Center, which includes City Hall and the library. Willow Pass Road and Parkside Drive is an intersection of a 4-lane arterial and a 2-lane local street.
- There were five collisions recorded at this intersection, one of which was a fatal collision involving a pedestrian. The primary collision factors were unsafe speeds, pedestrian violations, and improper turning.

Intersection Recommendations

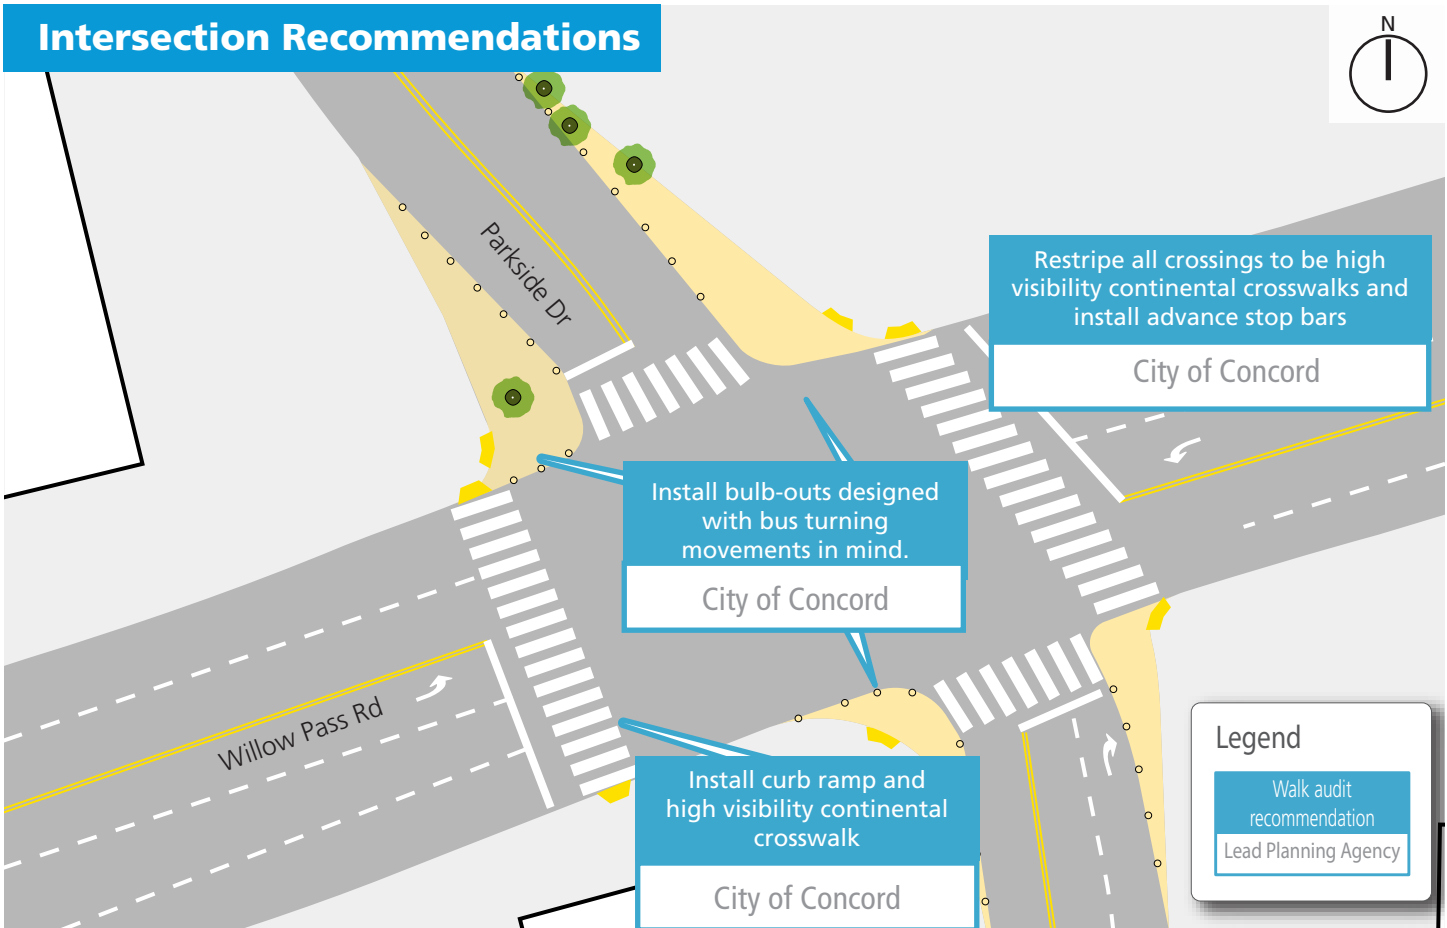

Safety Benefits

FHWA Tier 2 Safety Countermeasure to Reduce Vehicle Speeds:

- Bulb-outs reduce the turn radii and vehicle turning speed by forcing vehicles to make sharper turns.

FHWA Tier 4 Safety Countermeasure to Increase Attentiveness and Awareness:

- High-visibility crosswalks make crossing pedestrians more visible to drivers.
- Advance stop bars improve visibility of crossing pedestrians and increase distance between crossing pedestrians and stopped motorists.

Estimated Capital Cost

\$20,000 (Quick Build) - \$200,000

In US Dollars 2025